

M2C Grey

Description


M2C Grey is our solution to combine structural born damping with an easy applicable apply method. M2C Grey meets the need to create a higher comfort level on board without any fire or health risks.



Less weight
More possibilities

Weight reduction

This anti drumming paste has one of the lowest densities in the market. As a result the added weight is reduced to the minimum.




Less noise
More comfort

High damping

The acoustical performance is illustrated in the graphic below. A monolithic counter sheet can be used as well. This will not influence the performance.

Loss factor M2C Grey

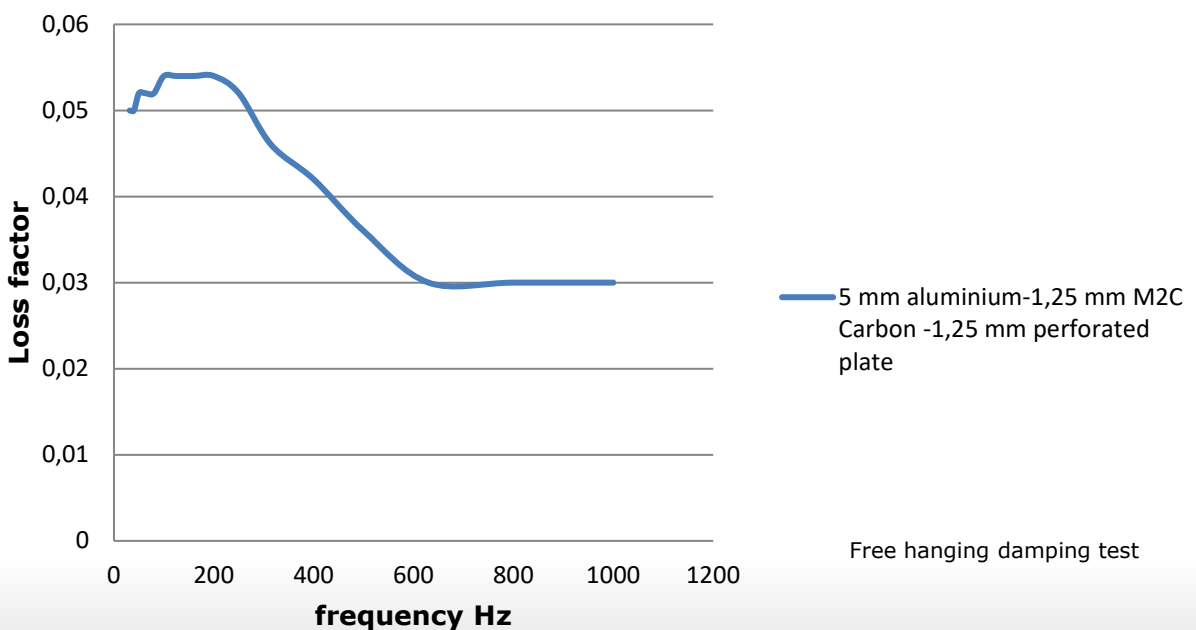



Less work
More results

Quick and Easy

In comparing most anti drumming systems, which are 2-component products, applying of M2C Grey is faster. Advise is to apply M2C Grey with a spatula. After opening the bucket, M2C Grey starts curing after 15 minutes. The processing temperature lies between +5 and 40 degrees.



Less vibrations
More layers

Material

M2C Grey is an almost pure MS polymer. Therefore it contains almost only non-flammable particles.

M2C Grey properties

Material colour	Grey
Dimension	Buckets of 16 litres
Applying	With counter sheet in ratio 4:1:1
Test results	Test results are available on request
Environment	M.S.D.S. on request available
Coating	Painting is possible
Weight	1,41 kg/m ² per mm thickness
Shelf life	1 year after production (on bucket)
Certificate	IMO certificated (on request available)



Less products –
More applications

Applications

- ceilings
- walls
- air ducts
- glue